

Style DD


Cast Iron (ASTM A 126, Class B)
125 lb. Class

Carbon Steel (ASTM A 216, Grade WCB)
150 lb. Thru 1500 lb. Class


Stainless Steel (ASTM A 351, Grade CF8M)
150 lb. Thru 1500 lb. Class



Style DL

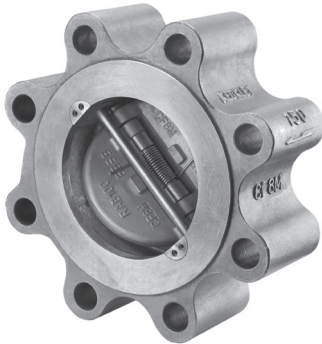

Style DF

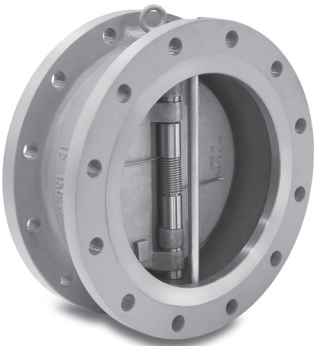

Wafer Double Disc Check Valve

APPLICATIONS

Flow reversal solutions for Liquid and Gas applications where protection from flow reversal in a pipeline is required

CONSTRUCTION

Keckley Style DD wafer body double disc check valves are produced by the investment casting process. These castings are thoroughly inspected and machined to exacting specifications. Reference individual technical data pages for standard materials utilized in the construction of valve components.

FEATURES

- A short face-to-face dimension.
- The spring loaded double disc design creates a low cracking pressure and allows for the valve discs to close prior to any flow reversal minimizing water hammer and/or surges in the media.
- Tension on the specially designed spring with extended spring legs allows the disc center section to lift off the seat prior to the outside edge opening preventing seat wear in the center “heel” section of the seating surface.
- Standard elastomeric seats can produce zero leakage when correctly specified, loaded, and installed. Metal seating surfaces are precision machined and lapped to a mirror finish to provide a long lasting seal which meets or exceeds the API 598 leakage standard.
- Retainerless design check valves have no body penetrations eliminating potential leak paths.
- Allows for interchangeability of the hinge pin and stop pin.
- Epoxy coating is standard.
- Field serviceable without the need for special tools.

INSTALLATION

The Style DD can be installed in both vertical and horizontal applications. Contact Keckley for all downward vertical flow installations.

ORDERING

Reference page C2 for Keckley Check Valve Product Numbers.


WORKING PRESSURES - NON SHOCK

NOM. RATING	BODY MATERIAL	MEDIA	2" to 12"	14" to 24"
125#	CAST IRON (ASTM A 126, CLASS B)	W.O.G.	200 PSI @ 150°F	150 PSI @ 150°F
NOM. RATING	BODY MATERIAL	MEDIA	2" to 24"	
150#	CARBON STEEL (ASTM A 216, GRADE WCB)	W.O.G.	285 PSI @ 100°F	
	STAINLESS STEEL (ASTM A 351, GRADE CF8M)	W.O.G.	275 PSI @ 100°F	
NOM. RATING	BODY MATERIAL	MEDIA	2" to 24"	
300#	CARBON STEEL (ASTM A 216, GRADE WCB)	W.O.G.	740 PSI @ 100°F	
	STAINLESS STEEL (ASTM A 351, GRADE CF8M)	W.O.G.	720 PSI @ 100°F	

Style DD

Wafer Body

Double Disc Check Valve, 125 lb. Cast Iron (ASTM A 126, Class B)

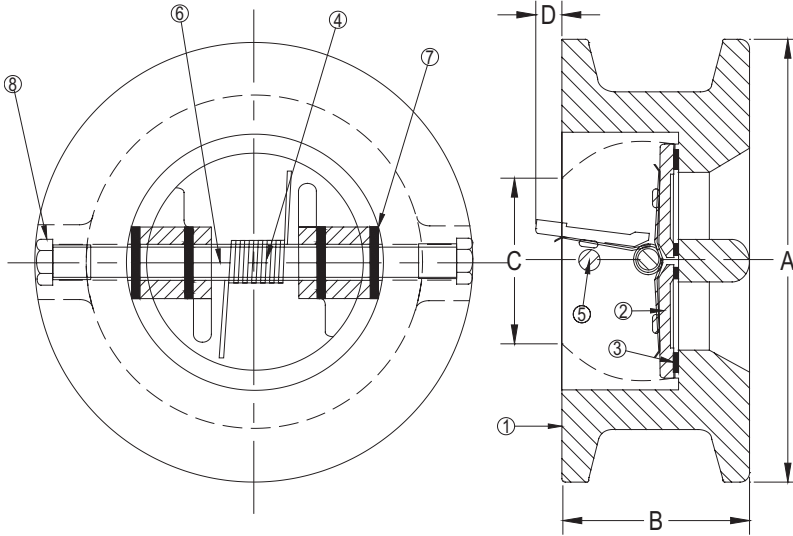

PARTS LIST		
ITEM	DESCRIPTION	MATERIAL
1	Body	Cast Iron (ASTM A 126, Class B)
2	Disc	Stainless Steel (ASTM A 351, Grade CF8)
3	Seat	Buna-N
4	Spring	Stainless Steel (ASTM A 182, 316)
5	Stop Pin	Stainless Steel (ASTM A 182, 304)
6	Hinge Pin	Stainless Steel (ASTM A 182, 304)
7	Thrust Washer	Teflon
8	Plug	Carbon Steel (ASTM A 307, B)

Above "Standard" Product Number - **DD1F-CI-34136**

Other Options - Reference **C2** for available materials.

Note: Contact the factory for all Class 250 requirements.

SIZE		DIMENSIONS								WEIGHTS	
		A		B		C*		D			
in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs
2	50	4-1/8	105	2-1/8	54	2-1/16	52	-	-	4	2
2-1/2	65	4-7/8	124	2-1/8	54	2-15/32	63	-	-	6	3
3	80	5-3/8	137	2-1/4	57	3-1/16	78	5/8	16	7	3
4	100	6-7/8	175	2-1/2	64	4	102	1	25	12	6
5	125	7-3/4	197	2-3/4	70	5	127	1-5/16	33	15	7
6	150	8-3/4	222	3	76	6-1/16	154	1-15/16	35	20	9
8	200	11	279	3-3/4	95	8	203	3-7/16	54	40	18
10	250	13-3/8	340	4-1/4	108	10	254	3-3/8	70	65	29
12	300	16-1/8	410	5-5/8	143	11-15/16	303	3-9/16	83	110	50
14	350	17-3/4	451	7-1/4	184	12-1/2	318	3-1/16	83	183	83
16	400	20-1/4	514	7-1/2	191	15	381	4-1/4	113	255	116
18	450	21-5/8	549	8	203	16-7/8	429	5-3/8	137	315	143
20	500	23-7/8	606	8-3/8	213	18-3/16	478	6-3/16	160	380	172
24	600	28-1/4	718	8-3/4	222	22-5/8	575	8-1/4	210	575	261
30	750	34-3/4	883	12	305	29-1/4	743	9-9/16	229	1070	486
36	900	41-1/4	1048	14-1/2	368	35	889	12-5/16	303	1962	890
42	1050	48	1219	17	432	41	1041	15	381	2800	1270
48	1200	54-1/2	1384	20-5/8	524	47	1194	16-3/4	425	3920	1778

*Minimum companion flange bore.

Size 30" and larger fit **Series A** flanges.


Applicable Standards	
•Design API 594	•ASME B16.1
•Testing API 598	•MSS SP-6
	•MSS SP-25

Seat Material	Operating Temperature**	
	°F	°C
Buna-N	-40 to 250	-40 to 121
Viton	-15 to 400	-26 to 204
EPDM	-60 to 250	-51 to 121

**Subject to limitations of body material.

PRESSURE vs. TEMPERATURE CHART

125# Cast Iron (ASTM A 126, Class B)

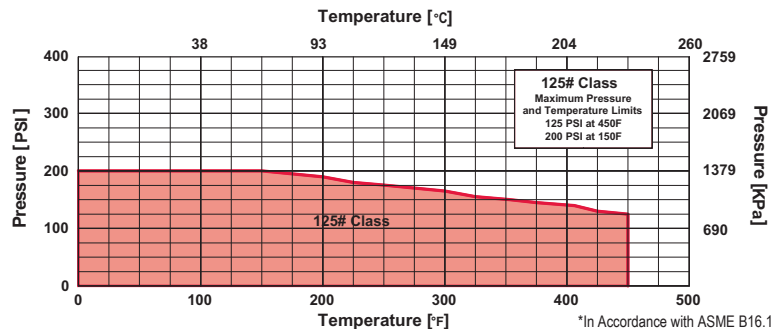

FLOW COEFFICIENTS

Size	C _v	Size	C _v	Size	C _v	Size	C _v	Size	C _v	Size	C _v
2"	48	4"	270	8"	1400	14"	5000	20"	12400	36"	60000
2-1/2"	77	5"	450	10"	2600	16"	7250	24"	20400	42"	89000
3"	135	6"	720	12"	3850	18"	10000	30"	38000	48"	124000



HEAD LOSS CHART

Wafer Double Disc Check Valve (Style DD, DL, and DF)

This head loss chart is based on the flow of clean water through the Keckley Double Disc Check Valve. The Keckley Style DD has a cracking pressure equal to or less than 0.3 psi when mounted horizontally. Check valves should be placed at a distance equal to 5 to 10 pipe diameters from any turbulence producing device such as elbows, pumps, etc.

TO USE CHARTS:

Find your desired rate of flow (GPM) on the left hand side of the chart. Follow its corresponding horizontal line to the point where it intersects the diagonal line indicating the check valve pipe size. From this point of intersection, follow the vertical line down to the bottom of the chart to determine the approximate head loss.

